

Distributed by:

JAMECO[®]
ELECTRONICS




www.Jameco.com ♦ 1-800-831-4242

The content and copyrights of the attached
material are the property of its owner.

Jameco Part Number 223221 (1-66505-0)

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION ,19 .
© COPYRIGHT 19 BY AMP INCORPORATED, HARRISBURG, PA. ALL INTERNATIONAL RIGHTS RESERVED. AMP PRODUCTS MAY BE COVERED BY U.S. AND FOREIGN PATENTS AND/OR PATENTS PENDING.

LOC GP	DIST 00	P	F	REVISIONS						
				ZONE	LTR	DESCRIPTION			DATE	APPD
					AK	REVISED PER EC 0513-0063-02			29APR02	JG

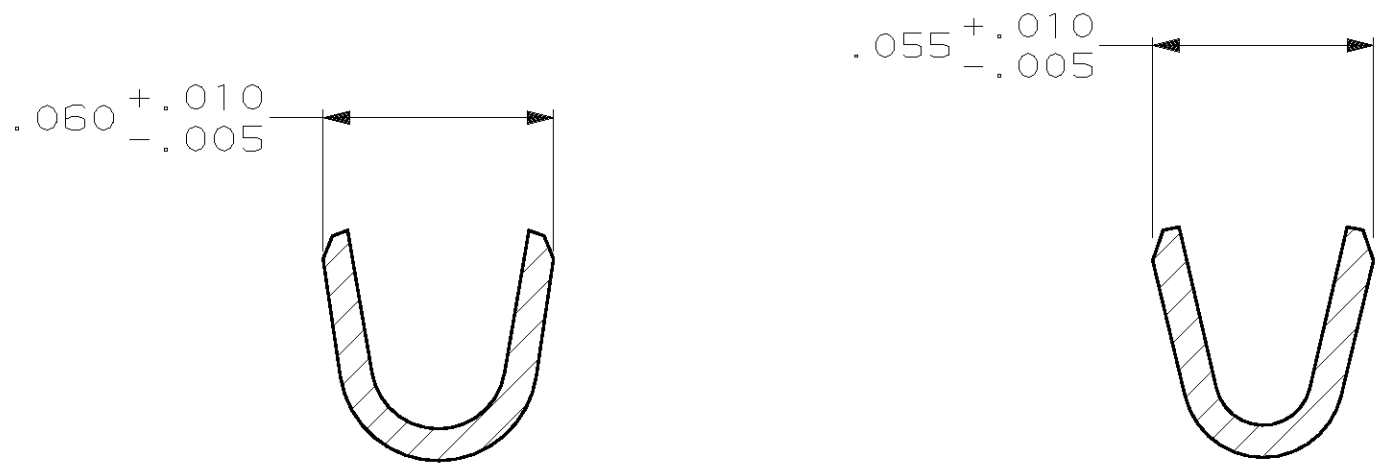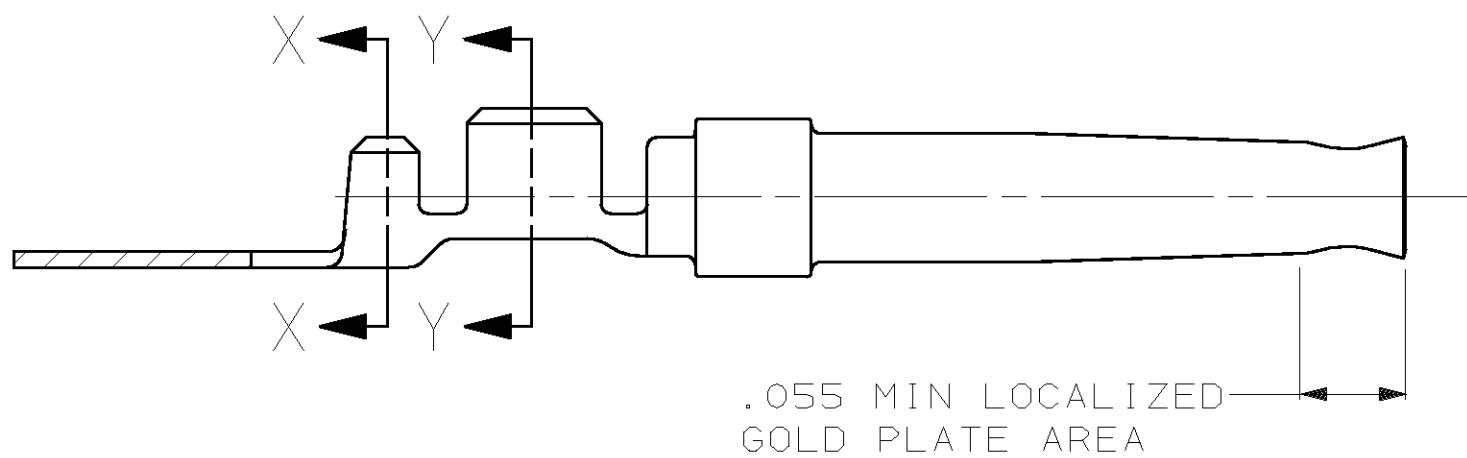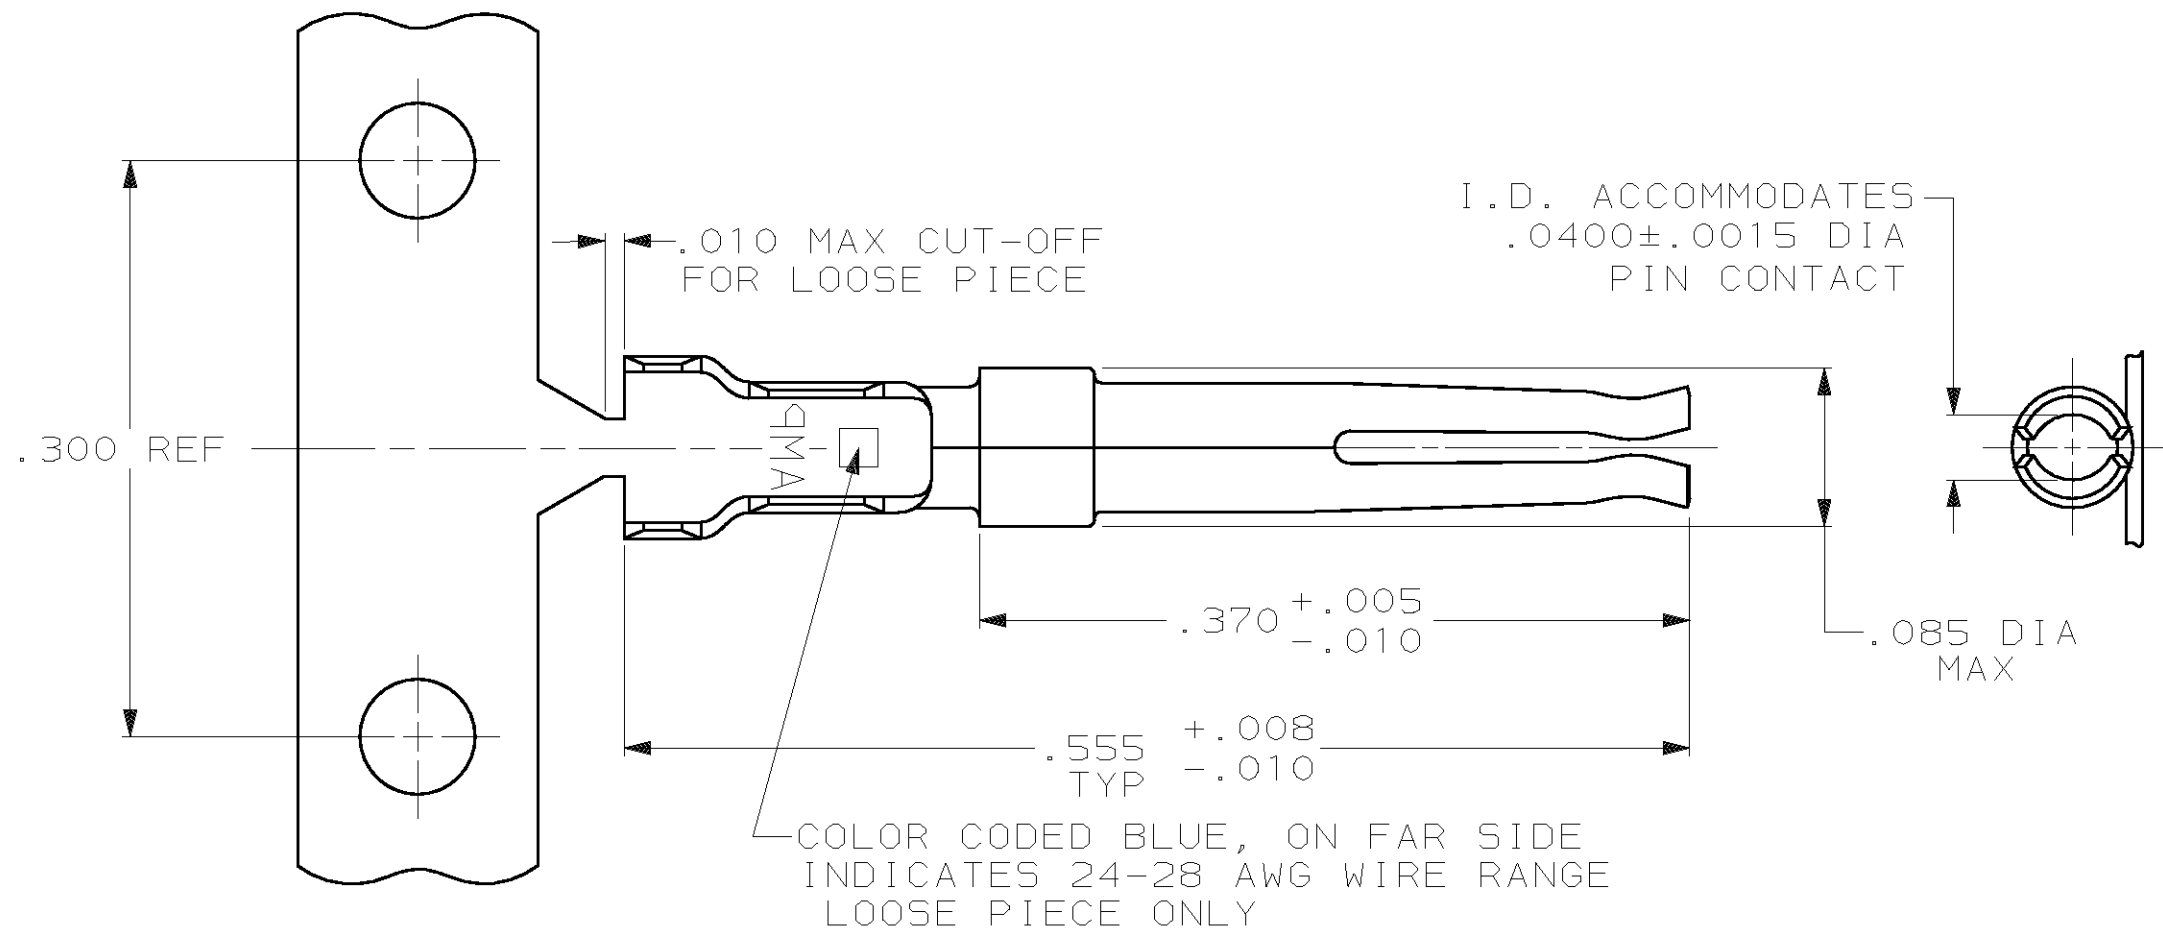

SECTION X-X
SCALE 20:1

SECTION Y-Y
SCALE 20:1

- 1 FOR MINI-APPLICATOR AND STRIPPER CRIMPER.
- 2 FOR HAND TOOL USE ONLY.
- 3 FOR STANDARD APPLICATOR PART #566184 ONLY.
- 4. WIRE RANGE OF 24-28, INSULATION RANGE OF .030-.040.
- 5. GOLD PLATING MAY NOT APPEAR ON CARRIER STRIP.
- 6 GOLD PLATING PER MIL-G-45204, NICKEL PLATING PER QQ-N-290, TIN PLATING PER MIL-T-10727, COPPER PLATING PER MIL-C-14550.
- 7 PLATED WITH .000050 GOLD OVER .000050 NICKEL.
- 8 PLATED WITH .000030 GOLD IN LOCALIZED GOLD PLATE AREA, GOLD FLASH ON REMAINDER, OVER .000050 NICKEL.
- 9 PLATED WITH GOLD FLASH OVER .000030 NICKEL.
- 10 PLATED WITH .000100-.000200 TIN.
- 11 PLATED WITH .000050 GOLD IN LOCALIZED GOLD PLATE AREA, GOLD FLASH ON REMAINDER, OVER .000050 NICKEL.
- 12 PLATED WITH .000015 GOLD IN LOCALIZED GOLD PLATE AREA, GOLD FLASH ON REMAINDER, OVER .000050 NICKEL.
- 13 PLATED WITH GOLD FLASH IN LOCALIZED GOLD PLATE AREA, TIN PLATED WIRE BARRELS, OVER .000030 NICKEL.
- 14 PLATED WITH .000030 GOLD IN LOCALIZED GOLD PLATE AREA, TIN PLATED WIRE BARRELS, OVER .000050 NICKEL.
- 15 AMP ITALY PART NUMBER ONLY.

SUPERSEDED BY 66505-9

15 OBSOLETE

SUPERSEDED BY 5-66505-7

OBSOLETE

OBSOLETE

STANDARD	13	3	STRIP	7-66505-0
SMALL PACK	8	2	LOOSE PIECE	6-66505-9
STANDARD	14	2	LOOSE PIECE	6-66505-2
STANDARD	14	1	STRIP	6-66505-0
STANDARD	13	2	LOOSE PIECE	5-66505-9
STANDARD	13	1	STRIP	5-66505-7
STANDARD	12	1	STRIP	5-66505-5
STANDARD	11	1	STRIP	2-66505-7
STANDARD	10	1	STRIP	1-66505-4
STANDARD	9	3	STRIP	1-66505-3
STANDARD	8	3	STRIP	1-66505-2
STANDARD	9	2	LOOSE PIECE	1-66505-0
STANDARD	8	2	LOOSE PIECE	66505-9
STANDARD	7	2	LOOSE PIECE	66505-8
STANDARD	9	1	STRIP	66505-4
STANDARD	8	1	STRIP	66505-3
STANDARD	7	1	STRIP	66505-2

PACKAGING TYPE	FINISH	USE	TYPE	PART NUMBER
-------------------	--------	-----	------	----------------

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ON : 2 PL DEC ± - 3 PL DEC ± .005 ANGLES ± -	DR 1-6-87 C.RICHARD	AMP AMP INCORPORATED Harrisburg, Pa. 17105		
	CHK 1-7-87 S.WELDON			
	APPD 1-7-87 L.BREKOSKY	NAME SOCKET CONTACT, SIZE 20 DF, 24-28 AWG, W/ .030-.040 DIA INSULATION SUPPORT, AMPLIMITE™		
	APPD 1-12-87 V.KUMAR			
MATERIAL PHOSPHOR BRONZE PER QQ-B-750	PRODUCT SPEC -	SIZE C	FSCM NO 00779	DRAWING NO 66505
FINISH 6 SEE TABLE	APPLICATION SPEC 114-10000	SCALE 10:1	SHEET 1 OF 1	
WEIGHT -				